


RONDA normtech 700

High performance quartz technology
with long battery-life

Caliber 705 – 10½'''

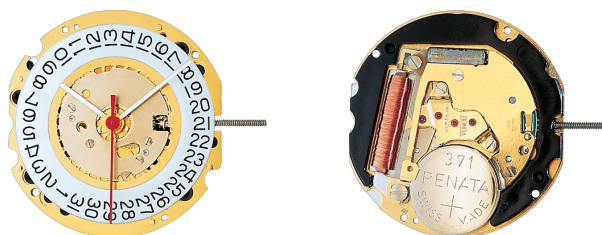

Product Specifications

Analog quartz movement

Line		normtech
Caliber		705
Size		10½'''
Version	Swiss Made Swiss Parts	5 Jewels / gold plated 1 Jewels / nickel plated
Battery life		60 Months
Hand fitting height		1

Features

- Metal movement, repairable
- Very long battery life
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%
- Movement available as 2 or 3 hands version

Functions

- Date
- 3 hands

Technical Specifications

Diameter Total	23.90 mm
Case fitting	23.30 mm
Movement height	2.50 mm
Height over Battery	2.75 mm
Movement rest	0.30 mm
Height over stem	1.00 mm
Length of stem travel	0.90 mm
Stem thread	0.90 mm
Battery type	371
Battery voltage	1.5 V
Battery life	60 Months
Current consumption – typical	0.96 µA (Date Mechanism not in Gear)
Current consumption – maximum	1.35 µA (Date Mechanism not in Gear)
Useful torque second – typical	5 µNm
Useful torque minute – typical	250 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

Watch production

[Drawing Casing ring \(standard, PDF\)](#)
[Drawing Dial \(stem 3h, calendar 3h, PDF\)](#)
[Drawing Dial \(stem 3h, calendar 3h, round, PDF\)](#)
[Drawing Dial \(stem 3h, calendar 6h, round, PDF\)](#)
[Drawing Dial \(stem 3h, calendar 4 1/2 h, PDF\)](#)
[Drawing Dial \(stem 3h, calendar 4h, PDF\)](#)
[Drawing Dial \(stem 3h, calendar 6h, PDF\)](#)
[Drawing Dial \(stem 3h, calendar 4h, PDF\)](#)
[Drawing Hand fitting \(hand height 6, PDF\)](#)
[Drawing Hand fitting \(hand height 0-5, PDF\)](#)
[Drawing Stem](#)
[Movement holders for T2 \(PDF\)](#)

User's manual

[User's manual \(PDF\)](#)

Watch repairs

[Technical instruction \(PDF\)](#)