


RONDA normtech 700

High performance quartz technology
with long battery-life

Caliber 708 – 10½'''

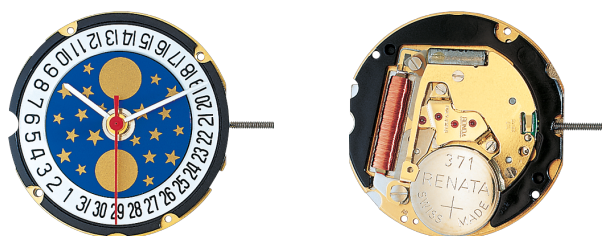

Product Specifications

Analog quartz movement

Line normtech

Caliber 708

Size 10½'''

Version Swiss Made 5 Jewels / gold plated
Swiss Parts 1 Jewels / nickel plated

Battery life 60 Months

Hand fitting height 1

Features

- Metal movement, repairable
- Very long battery life
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%

Functions

- Moon phase
- Date
- 3 hands

Technical Specifications

Diameter Total	23.90 mm
Case fitting	23.30 mm
Movement height	2.98 mm
Height over Battery	3.23 mm
Movement rest	0.30 mm
Height over stem	1.48 mm
Length of stem travel	0.90 mm
Stem thread	0.90 mm
Battery type	371
Battery voltage	1.5 V
Battery life	60 Months
Current consumption – typical	0.96 µA (Date Mechanism not in Gear)
Current consumption – maximum	1.35 µA (Date Mechanism not in Gear)
Useful torque second – typical	8 µNm
Useful torque minute – typical	400 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

Watch production

[Drawing Casing ring \(standard, PDF\)](#)
[Drawing Dial \(stem 3h, calendar 3h, PDF\)](#)
[Drawing Dial \(stem 3h, calendar 6h, PDF\)](#)
[Drawing Dial \(stem 12h, calendar 6h, PDF\)](#)
[Drawing Hand fitting \(hand height 1, PDF\)](#)
[Drawing Stem](#)
[Movement holders for T2 \(PDF\)](#)

User's manual

[User's manual \(PDF\)](#)

Watch repairs

[Technical instruction \(PDF\)](#)