


RONDA normtech 700

High performance quartz technology
with long battery-life

Caliber 785 – 8³/₄'''

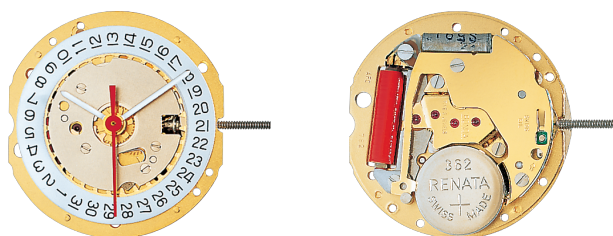

Product Specifications

Analog quartz movement

Line normtech

Caliber 785

Size 8³/₄'''

Version Swiss Made 5 Jewels / gold plated
Swiss Parts 1 Jewels / nickel plated

Battery life 42 Months

Hand fitting height 1

Features

- Metal movement, repairable
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%
- Movement available as 2 or 3 hands version

Functions

- Date
- 3 hands

Technical Specifications

Diameter Total	20.00 mm
Case fitting	19.40 mm
Movement height	2.50 mm
Height over Battery	2.75 mm
Movement rest	0.30 mm
Height over stem	1.00 mm
Length of stem travel	0.90 mm
Stem thread	0.90 mm
Battery type	362
Battery voltage	1.5 V
Battery life	42 Months
Current consumption – typical	0.82 µA (Date Mechanism not in Gear)
Current consumption – maximum	1.35 µA (Date Mechanism not in Gear)
Useful torque second – typical	7 µNm
Useful torque minute – typical	350 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

Watch production

Drawing Casing ring (standard, PDF)
 Drawing Dial (stem 3h, calendar 3h, PDF)
 Drawing Dial (stem 3h, calendar 6h, round, PDF)
 Drawing Dial (stem 3h, calendar 4h, round, horizontal, PDF)
 Drawing Dial (stem 3h, calendar 3h, round, PDF)
 Drawing Dial (stem 3h, calendar 6h, PDF)
 Drawing Dial (stem 3h, calendar 5h, PDF)
 Drawing Hand fitting (hand height 6, PDF)
 Drawing Hand fitting (hand height 0-5, PDF)
 Drawing Stem
 Movement holders for T2 (PDF)

User's manual

User's manual (PDF)

Watch repairs

Technical instruction (PDF)